

Product Specification Sheet

Evernatural Classic

USES:

Playgrounds
Parks
Soccer Field
Football Field
General Sports Fields
Commercial or Residential
Medium-Heavy Traffic

SPECIFICATIONS:

Pile Height: 1- $\frac{3}{4}$ "
Turf Gauge: 3/8"
Face Weight: 60 oz./yd²
Backing Weight: 36 oz./yd²
Total Weight: 96 oz./yd²
Stitch Rate: 11/10cm
Stitches/m²: 11550
Material/Dtex: PE 14000 + PP 4500
Color: Lime Green, Field Green, Light
Brown and Emerald Green
Type Of Fiber: PE Monofilament and PP
Curled Thatch



Certificate of Analysis Summary 627505

Watersavers Turf, San Rafael, CA

Project Name: Turf Testing



Project Id: Turf Testing Series 13

Project Location: USA

Date Received in Lab: Tue Jun-11-19 04:00 pm

Report Date: 20-JUN-19

Project Manager: John Builes

Analysis Requested	Lab Id:	627505-001					
	Field Id:	Turf Testing Series 13					
	Depth:						
	Matrix:	SOLID					
	Sampled:	Jun-07-19 00:00					
Total Lead SUB: T104704215-19-29	Extracted:	Jun-16-19 14:30					
	Analyzed:	Jun-17-19 23:09					
	Units/RL:	mg/kg RL					
Lead		<0.833 0.833					

This analytical report, and the entire data package it represents, has been made for your exclusive and confidential use. The interpretations and results expressed throughout this analytical report represent the best judgment of XENCO Laboratories. XENCO Laboratories assumes no responsibility and makes no warranty to the end use of the data hereby presented. Our liability is limited to the amount invoiced for this work order unless otherwise agreed to in writing.


Houston - Dallas - Midland - Tampa - Phoenix - Lubbock - San Antonio - El Paso - Atlanta - New Mexico

John Builes
Project Manager

CERTIFICATE OF ANALYSIS

Client: Watersavers Turf
Product: Evernatural Classic
Xenco Sample #: 627505
Lead Results: Less than one part per million

Synthetic fibers from turf product Evernatural Classic, taken by Watersavers Turf 06-07-19, and received by Xenco Labs 06-11-19, were analyzed by Xenco Labs 06-17-19 for total lead by method ASTM G 2765-09 (EPA 6010). The results were less than one milligram lead per kilogram synthetic fiber (<1.00 mg/Kg).



Dr. Blair Leftwich, Director

06/18/19

Date

TEST REPORT

CLIENT:

Company:	Watersavers Turf	Report Number:	74112B
Address:	4316 Redwood Hwy, Ste 100	Lab Test Number:	3019-6605
	San Rafael, CA 94903	Test Completion Date:	6/5/2018
		Report Date:	6/18/2018
		Page:	1 of 1

TEST MATERIAL:

Material Type:	Synthetic Turf	Date Received:	5/30/2018
Material Condition:	EXCELLENT: XXX GOOD: POOR: REJECTED:		
Turf ID:	Evernatural Classic		
Infill:	None		

TESTING METHODS REQUESTED:

Testing Services Inc. was instructed by the client to test for the following...			
Standard:	ASTM F1551	Test Method:	Standard Test Methods for Comprehensive Characterization of Synthetic Turf Playing Surfaces and Materials: Suffix-DIN 18-035, Part 6: Water Permeability of Synthetic Turf Systems and Permeable Bases

SAMPLING PLAN:

Sampling Date:	5/30/2018
<ul style="list-style-type: none"> Specimen sampling is performed in the sampling department at TSI. The sampling size of specimens is determined by the test method requirements. In the event a specific sampling size is not called for, a determination will be made based on previous testing experience, and approved for use by an authorized manager. All samples are subjected to the outside environmental conditions of temperature and relative humidity. Sample requiring pre-determined exposure to specified environmental conditions based on a specific test method, take place in the departments in which they are tested 	

PROCEDURE:

This test method determines the rainfall drainage capacity (permeability) of the playing surface. Test data values represent drainage rates vertically thru the turf, and do not take into account the percolation properties of any infill, pad and/or an underlying sub base. Three specimens, 11.5" diameter, were cut from the 15' turf roll, side-center-side manner. Each turf specimen was securely fastened to the permeability tube using mechanical flanges, ensuring vertical water flow thru the product. The water was pumped into the tube faster than could exit, until the water level reached 6". The water source was shut off, allowing the accumulated 6" water level to recede. The recede was timed via stopwatch until the water level exited the turf. The flow time was recorded in seconds. This procedure was repeated a total of 4 times where, the first pass was for conditioning, with passes 2,3,4 used for averaging. This process was repeated on the remaining specimens.

DEVIATION FROM TEST METHOD:

State reason for any Deviation from, Additions to, or Exclusions From Test Method.
None

TEST SUMMARY:

Specimen #	Drainage (Seconds)	gal/min/yd ²	Rainfall Capacity (inches/hour)
1	160.3	12.6	38.7
2	140.4	14.4	44.2
3	120.1	16.8	51.6
Average			44.2 inches/hour

Uncertainty:

We undertake all assignments for our clients on a best effort basis. Our findings and judgments are based on the information to us using the latest test methods available. TSI can only ensure the test results for the specific items tested. Unless otherwise noted in the deviations sections of this report, all tests are performed in compliance with stated test method.

Test Report Approval:

 Erle Miles, III, Lab Director Testing Services Inc.

TSI Accreditation: TSI is a certified independent testing laboratory by the Synthetic Turf Council



OUR LETTERS AND REPORTS APPLY ONLY TO THE SAMPLE TESTED AND ARE NOT NECESSARILY INDICATIVE OF THE QUALITIES OF APPARENTLY IDENTICAL OR SIMILAR PRODUCTS. THESE LETTERS AND REPORTS ARE FOR THE USE ONLY OF THE CLIENT TO WHOM THEY ARE ADDRESSED AND THEIR COMMUNICATION TO ANY OTHERS OR THE USE OF THE NAME TESTING SERVICES, INC. MUST RECEIVE OUR PRIOR WRITTEN APPROVAL. OUR REPORTS, LETTERS, NAME, SEALS, OR INSIGNIA ARE NOT UNDER ANY CIRCUMSTANCES TO BE USED IN ADVERTISING TO THE GENERAL PUBLIC.

PO Box 2041
Dalton, GA 30722-2041
(706) 226-1400
tsioffice@optilink.us

TEST REPORT

CLIENT:

Company:	Watersavers Turf	Report Number:	79405
Address:	4316 Redwood Hwy, Ste 100	Lab Test Number:	3169-2439
	San Rafael, CA 94903	Test Completion Date:	1/16/2020
		Report Date:	1/18/2020
		Page:	1 of 1

TEST MATERIAL:

Material Type:	Synthetic Turf	Date Received:	1/13/2020
Material Condition:	EXCELLENT: XXX GOOD: POOR: REJECTED:		
Turf Identification:	Evernatural Classic		
Infill:	None		

TESTING METHODS REQUESTED:

Testing Services Inc. was instructed by the client to test for the following...			
Standard:	ASTM D2859	Test Method:	Standard Test Method for Ignition Characteristics of Finished Textile Pile Yarn Floorcoverings

SAMPLING PLAN:

Sampling Date:	1/13/2020
<ul style="list-style-type: none"> Specimen sampling is performed in the sampling department at TSI. The sampling size of specimens is determined by the test method requirements. In the event a specific sampling size is not called for, a determination will be made based on previous testing experience, and approved for use by an authorized manager. All samples are subjected to the outside environmental conditions of temperature and relative humidity. Sample requiring pre-determined exposure to specified environmental conditions based on a specific test method, take place in the departments in which they are tested 	

DEVIATION FROM TEST METHOD:

State reason for any Deviation from, Additions to, or Exclusions From Test Method.
Specimens were not exposed to air circulating oven.

TEST SCOPE:

This test method provides a method of determining the flammability characteristics of textile products when exposed to an ignition source in a laboratory environment. Eight specimens were taken from the sample lot, 230mm X 230mm, and preconditioned in an air circulating oven @ 150°C for 2 hours. After removal from the oven, the specimens are placed into a desiccator for 1 hour prior to performing the test. Each specimen was then placed into the test chamber floor with the pile surface up and a steel frame, 230mm X 230mm with 200mm diameter hole, placed on top of the specimen. A methenamine tablet was placed centrally onto the pile surface. The pill was ignited using a lighted match, with the ignition flame and propagated flame allowed to self-extinguish.

CRITERIA:

The specimen passes, if the charred portion of the test specimen, did not extend to within 25mm (1") of the diameter hole of the steel frame. The U.S. Consumer Product Safety Commission requires that at least seven of the eight specimens pass the test for acceptance as meeting the standard.

TEST SUMMARY:

TEST METHOD	TEST DESCRIPTION	TEST RESULT
ASTM D2859-16	Ignition Characteristics of Textile Floor Coverings (Pill Test)	8 out of 8 Pass Passes, U.S. CPSC 16CFR 1630 (FF1-70), Carpets & Rugs

Uncertainty:

We undertake all assignments for our clients on a best effort basis. Our findings and judgments are based on the information to us using the latest test methods available.

TSI can only ensure the test results for the specific items tested.

Unless otherwise noted in the deviations sections of this report, all tests are performed in compliance with stated test method.

Test Report Approval:


 Erle Miles, III, Lab Director Testing Services (TSI) LLC

Erle Miles, III, Lab Director Testing Services (TSI) LLC

TSI Accreditation: Our laboratory is accredited by the US Dept. of Commerce, National Institute of Standards and Technology: ISO/IEC 17025:2005. Our code # is: NVLAP 100108-0. TSI is a certified independent testing laboratory by the Synthetic Turf Council



100108-0



SOD STAPLE 6" x 1" x 6"

DRAINAGE PASS THROUGH FOR
WATER IN PUNCHED HOLES
THROUGHOUT BACKING


SEAMING TAPE

SPECIFICATIONS

YARN TYPE	POLYETHYLENE BLADE
THATCH YARN TYPE	POLYPROPYLENE CURLED AS THATCH
PILE HEIGHT	1 3/4"
TURF GAUGE	3/8"
FACE WEIGHT	60 OZ/YD ²
BACKING WEIGHT	46 OZ/YD ²
TOTAL WEIGHT	106 OZ/YD ²
STITCH RATE	10.2/10 CM
STITCHES/M ²	10710
COLOR	LIME GREEN, FIELD, LIGHT BROWN AND EMERALD GREEN GREEN WITH BROWN AND FIELD GREEN THATCHING

ROLL SIZE (FEET) 15' x 100'

MAXIMUM DRAIN RATE > 30 INCHES PER HOUR

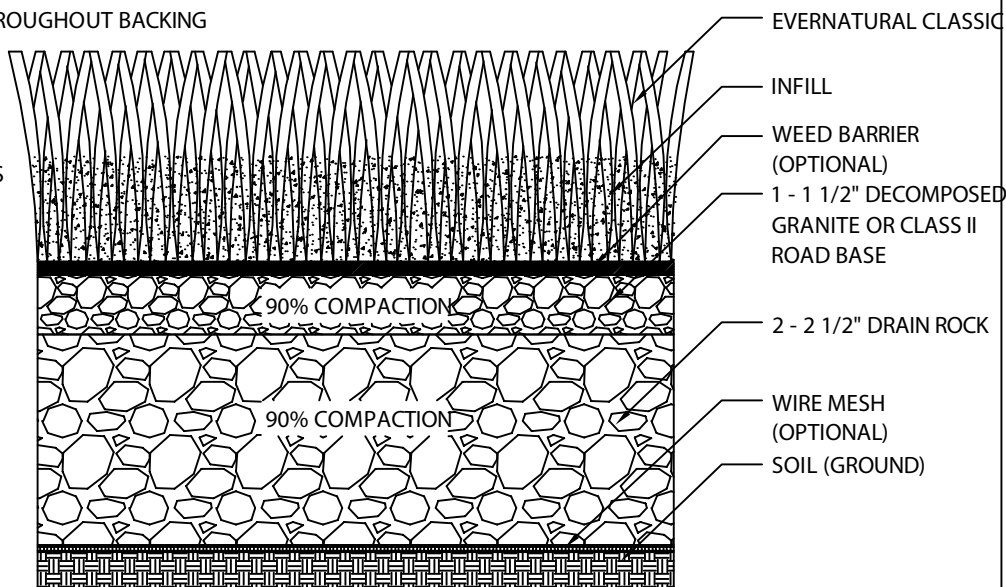


SECTION



SEAMING

SOD STAPLES ARE
RECOMMENDED TO SEAM
THE SEAMS



SECURING TURF TO BASE


BRIGHT COMMON 40D/60D
NAILS OR GALVANIZED NAILS
6' APART ALONG PERIMETER
SEAMS.



POWER BROOM AFTER
INSTALLATION IS
COMPLETE

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: FIELD GREEN AND OLIVE GREEN WITH BROWN AND FIELD GREEN THATCHING.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



EVERNATURAL CLASSIC

TEST REPORT

CLIENT:

Company:	Watersavers Turf	Report Number:	74112A
Address:	4316 Redwood Hwy, Ste 100	Lab Test Number:	3019-6605
	San Rafael, CA 94903	Test Completion Date:	6/4/2018
		Report Date:	6/18/2018
		Page:	1 of 1

TEST MATERIAL:

Material Type:	Synthetic Turf					Date Received:	5/30/2018
Material Condition:	EXCELLENT:	XXX	GOOD:		POOR:		REJECTED:
Turf ID:	Evernatural Classic						

TESTING METHODS REQUESTED:

<i>Testing Services Inc. was instructed by the client to test for the following...</i>			
Standard:	ASTM D5848-10E1	Test Method:	Standard Test Method for Mass Per Unit Area of Pile Yarn Floorcoverings

SAMPLING PLAN:

Sampling Date:	5/30/2018
<ul style="list-style-type: none"> Specimen sampling is performed in the sampling department at TSI. The sampling size of specimens is determined by the test method requirements. In the event a specific sampling size is not called for, a determination will be made based on previous testing experience and approved for use by an authorized manager. All samples are subjected to the outside environmental conditions of temperature and relative humidity. Sample requiring pre-determined exposure to specified environmental conditions based on a specific test method, take place in the departments in which they are tested 	

DEVIATION FROM TEST METHOD:

State reason for any Deviation from, Additions to, or Exclusions From Test Method.
None

TEST SUMMARY:

TEST METHOD	TEST DESCRIPTION	TEST RESULT
ASTM D5848-10e1	Average Total Product Weight	95.34 oz/yd ²
ASTM D5848-10e1	Pile Yarn Weight	60.21 oz/yd ²

Uncertainty:

We undertake all assignments for our clients on a best effort basis. Our findings and judgments are based on the information to us using the latest test methods available. TSI can only ensure the test results for the specific items tested. Unless otherwise noted in the deviations sections of this report, all tests are performed in compliance with stated test method.

Test Report Approval:

 Digitally signed by Erle Miles, III, Lab Director Testing Services Inc.
Date: 2018.06.18 17:51:17 -0400

TSI Accreditation: TSI is a certified independent testing laboratory by the Synthetic Turf Council



TEST REPORT

CLIENT:

Company:	Watersavers Turf	Report Number:	79423
Address:	4316 Redwood Hwy, Ste 100	Lab Test Number:	3169-2422
	San Rafael, CA 94903	Test Completion Date:	1/17/2020
		Report Date:	1/18/2020
		Page:	1 of 1

TEST MATERIAL:

Material Type:	Synthetic Turf	Date Received:	1/13/2020
Material Condition:	EXCELLENT: XXX GOOD: POOR: REJECTED:		
Product ID:	Evernatural Classic		

TESTING METHODS REQUESTED:

Testing Services Inc. was instructed by the client to test for the following...			
Standard:	ASTM D1335	Test Method:	Standard Test Method for Tuft Bind Strength of Pile Yarn Floorcoverings

SAMPLING PLAN:

Sampling Date:	1/13/2020
<ul style="list-style-type: none"> Specimen sampling is performed in the sampling department at TSI. The sampling size of specimens is determined by the test method requirements. In the event a specific sampling size is not called for, a determination will be made based on previous testing experience, and approved for use by an authorized manager. All samples are subjected to the outside environmental conditions of temperature and relative humidity. Sample requiring pre-determined exposure to specified environmental conditions based on a specific test method, take place in the departments in which they are tested 	

DEVIATION FROM TEST METHOD:

State reason for any Deviation from, Additions to, or Exclusions From Test Method.
None

TEST SUMMARY:

TEST METHOD	TEST DESCRIPTION	TEST RESULT
ASTM D1335-17e1	Average Tuft Bind Strength	10.3 lbs/force

➤ Each individual pull was made from a combination of monofilament and textured fibers, same needle site

Pull #1	10.27 lbs/force	Pull #2	10.48 lbs/force	Pull #3	12.44 lbs/force	Pull #4	9.938 lbs/force	Pull #5	11.47 lbs/force
Pull #6	10.82 lbs/force	Pull #7	6.161 lbs/force	Pull #8	6.964 lbs/force	Pull #9	11.80 lbs/force	Pull #10	11.80 lbs/force
Pull #11	12.05 lbs/force	Pull #12	14.15 lbs/force	Pull #13	10.48 lbs/force	Pull #14	6.564 lbs/force	Pull #15	9.087 lbs/force

Uncertainty:

We undertake all assignments for our clients on a best effort basis. Our findings and judgments are based on the information to us using the latest test methods available.

TSI can only ensure the test results for the specific items tested.

Unless otherwise noted in the deviations sections of this report, all tests are performed in compliance with stated test method.

Test Report Approval:

 Digitally signed by Erle Miles, III, DN: cn=Erle Miles, o=Testing Services, Inc., email=erle.miles@testing-services.com, c=US, Date: 2020.01.18 10:00:00 -0500

Erle Miles, III, Lab Director Testing Services (TSI) LLC

TSI Accreditation:

Our laboratory is accredited by the US Dept. of Commerce, National Institute of Standards and Technology: ISO/IEC 17025:2005. Our code # is: NVLAP 100108-0. TSI is a certified independent testing laboratory by the Synthetic Turf Council



TEST REPORT

CLIENT:

Company:	Watersavers Turf	Report Number:	79697
Address:	4316 Redwood Hwy, Ste 100	Lab Test Number:	3176-2699
	San Rafael, CA 94903	Test Completion Date:	2/18/2020
		Report Date:	2/19/2020
		Page:	1 of 1

TEST MATERIAL:

Material Type:	Synthetic Turf	Date Received:	2/7/2020
Material Condition:	EXCELLENT: XXX GOOD: POOR: REJECTED:		
Product ID:	Evernatural Classic		

TESTING METHODS REQUESTED:

Testing Services Inc. was instructed by the client to test for the following...			
Standard:	ASTM D5034	Test Method:	Standard Test Method for Breaking Strength of Textile Fabrics (Grab)

SAMPLING PLAN:

Sampling Date:	2/7/2020
<ul style="list-style-type: none"> Specimen sampling is performed in the sampling department at TSI. The sampling size of specimens is determined by the test method requirements. In the event a specific sampling size is not called for, a determination will be made based on previous testing experience and approved for use by an authorized manager. All samples are subjected to the outside environmental conditions of temperature and relative humidity. Sample requiring pre-determined exposure to specified environmental conditions based on a specific test method, take place in the departments in which they are tested 	

DEVIATION FROM TEST METHOD:

State reason for any Deviation from, Additions to, or Exclusions From Test Method.
None

TEST SUMMARY:

TEST METHOD	TEST DESCRIPTION	TEST RESULT
ASTM D5034-09(2017)	Average Grab Tear Strength of Length Direction (MD)	193.2 lbs/force
ASTM D5034-09(2017)	Average Grab Tear Strength of Width Direction (CMD)	173.8 lbs/force

Uncertainty:

We undertake all assignments for our clients on a best effort basis. Our findings and judgments are based on the information to us using the latest test methods available.

TSI can only ensure the test results for the specific items tested.

Unless otherwise noted in the deviations sections of this report, all tests are performed in compliance with stated test method.

Test Report Approval:

 Digitally signed by Erle Miles, III, on 02/19/2020 at 14:52:51 -0500.
DN: cn=Erle Miles, o=Testing Services, ou=TSI, email=erle@testing-services.com, c=US

Erle Miles, III, Lab Director Testing Services (TSI) LLC

TSI Accreditation:

Our laboratory is accredited by the US Dept. of Commerce, National Institute of Standards and Technology: ISO/IEC 17025:2005. Our code # is: NVLAP 100108-0.
TSI is a certified independent testing laboratory by the Synthetic Turf Council



Technical Data Sheet: Evernatural Classic

Product Properties:	Property	Imperial Unit	Metric Unit	Description
	Fiber Type			Polyethylene Monofilament and Polypropylene Curled as Thatch
	Fiber Mass	Denier 12600/4050 Monofilament	Detex 14000/4500 Monofilament	Polyethylene
	Pile Height	1.75 in	44.45 mm	
	Color(s)			Lime Green, Field Green, Light Brown and Emerald Green with Brown and Green Thatching
	Tufting Gauge	.375 in	9.525 mm	
	Stitch Rate	11.176/4in	11/10cm	
	Stitches	13,813.685/yd ²	11,550/m ²	
	Primary Backing	5.899 oz/yd ²	200.00 g/m ²	Polypropylene and Polyester fiber
	Secondary Backing	29.231 oz/yd ² ±5%	991.148 g/m ² ±5%	Urethane
	Total Backing Weight	35.13 oz/yd ² ±1.5oz	1,191.148 g/m ² ±50g	
	Micron	180-360 (assorted)		

Performance Properties:	Property	Imperial Unit	Metric Unit	Test Method
	Face Weight	60.21 oz/yd ²	2,041.532 g/m ²	ASTM D5848-10e1
	Total Weight	95.34 oz/yd ²	3,232.680 g/m ²	ASTM D5848-10e1
	Permeability	44.2 in/ft ² /hr	1,208.482 cm/m ² /hr	ASTM F1551; Suffix-DIN 18-035, Part 6
	Melting Point	176 °F for Blades (greens and brown) 250 °F for Thatch (brown and curled)	80 °C for Blades(greens and brown) 121 °C for Thatch (brown and green curled)	
	Tuft Bind	10.3 lb-f	45.817 N	ASTM-D1335-17e1
	Grab Tear MD	193.2lb-f	859.396 N	ASTM-D5034-05
	Grab Tear CMD	173.8 lb-f	773.101 N	ASTM-D5034-05
	Infill Amount (recommended)	¾ of the Pile Height		

Packaging:	Property	Imperial Unit	Metric Unit	Description
	Model Number			Evernatural Classic
	Roll Width	15 ft	4.57 m	
	Roll Length	100 ft	30.48 m	
	Area per Roll	1,500 ft ²	139.355 m ²	
	Total Roll Weight	1,034 lbs	469.015kg	